


For Sale/Wanted

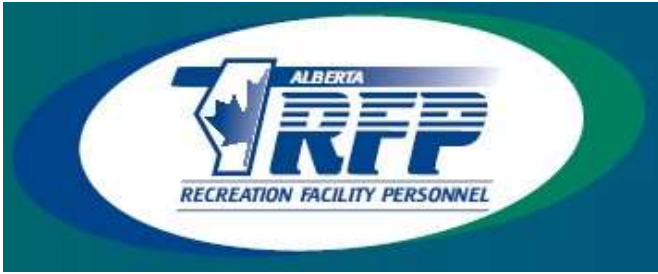

Posted September 26, 2019

FOR SALE – HOT TUB SAND FILTERS

2X Triton II TR-140 High Rate Sand Filters for Swimming Pools or Spas, for residential or public use.

These filters were bought and installed in late 2014 and used only until our spring 2016 renovations. Please make us an offer or contact Pim for more information.

Pim Scholten, Facility Operations Coordinator
Trico Centre for Family Wellness
11150 Bonaventure Drive SE I Calgary T2J 6R9
Ph: 587.393.9555 I Fax: 403.278.7573

pscholten@tricocentre.ca

www.tricocentre.ca

Go to 2nd page for specs.





Pentair
Pool Products®

Triton® II

High Rate Sand Filter for Swimming Pools or Spas, for Residential or Public Use

OPERATING INSTRUCTIONS

INITIAL FILTER START-UP

1. Ensure backwash line is open and set control valve to backwash position.
2. Open manual air bleeder.
3. Stand clear of filter. Start pump, allow tank to be filled with water and come out backwash line in a steady flow. Close air bleeder when a steady stream of water emerges.
4. Stop pump. Set valve to filter position. Ensure return line is open.
5. Open manual air bleeder. Stand clear of filter. Start pump for normal operation. Close air bleeder when steady stream of water emerges.
6. Make sure the flow is returning to the pool. Note the clean filter pressure.

CLEANING FILTER

Necessary only when flow diminishes considerably or when pressure gauge reading increases 10 psi over clean filter pressure.

1. Stop pump. Set valve to backwash position. Ensure backwash line is open.
2. Stand clear of filter, start pump and backwash until waste water is clean (approx. 3-5 mins.).
3. Stop pump. Set valve to rinse position. Stand clear of filter, start pump for 30 seconds.
4. Stop pump. Set valve to filter position. Ensure return line is open. Open air bleeder. Stand clear of filter, start pump. For normal operation, close air bleeder when steady stream of water emerges.

For complete filter operation refer to Installation, Operation and Service Manual.

NOT RECOMMENDED FOR BURIED INSTALLATION.

P/N **140243**
FLT TR140 NO VLV SND ALM
SERIAL NO. **G101125140005G**
DATE 05/05/2014

CONTAINER ID **SITE E**

NSF



57065685

MODEL	TR-40	TR-50	TR-60	TR-100	TR-100HD	TR-140	
FILTRATION AREA sq. ft. (M ²)	1.92 (0.18)	2.46 (0.23)	3.14 (0.29)	4.91 (0.45)	4.91 (0.45)	7.06 (0.65)	
FILTRATION gpm/sq. ft.	20	20	20	15	15	15	
FILTRATION FLOW RATE gpm (l/m)	38 (144)	49 (185)	63 (238)	74 (280)	74 (280)	106 (401)	
MINIMUM BACKWASH FLOW RATE (l/m)	29 (110)	37 (140)	47 (178)	74 (280)	74 (280)	106 (401)	
MAXIMUM WORKING PRESSURE PSI (bar)	50 (3.4)	50 (3.4)	50 (3.4)	50 (3.4)	75 (5.1)	50 (3.4)	
MAXIMUM DESIGN PRESSURE DROP	2.2 psi (0.14 bar)	2.7 psi (0.17 bar)	3.5 psi (0.23 bar)	3.5 psi (0.23 bar)	3.5 psi (0.23 bar)	5 psi (0.33 bar)	
	38 gpm (0.6 M ³ /H)	49 gpm (1.1 M ³ /H)	63 gpm (14.3 M ³ /H)	74 gpm (16.8 M ³ /H)	74 gpm (16.8 M ³ /H)	106 gpm (24.1 M ³ /H)	
CLEARANCE	VERTICAL in. (cm)	36 (91)	36 (90)	40 (102)	46 (117)	46 (117)	52 (132)
	HORIZONTAL in. (cm)	40 (102)	42 (107)	45 (114)	48 (123)	48 (123)	56 (142)
MEDIA REQUIRED	#20 SILICA SAND lb. (kg) .018 to .022 in. Size	125 (57)	175 (79)	275 (125)	490 (224)	490 (224)	660 (299)
	PEA GRAVEL 9 lb. (kg) 1/8" to 1/4"	50 (23)	50 (23)	50 (23)	150 (68)	150 (68)	275 (125)

Pentair Pool Products, Sanford, NC - Moorpark, CA (USA)

MODEL NO. PUNCHED OUT ABOVE

15-4588 rev. H